EVISION ENERGY

COMPANY BROCHURE



The Future is Fully Charged

E-MOBILITY | BUSWAY SYSTEMS

✚ MEP — DOHA, QATAR



WHO WE ARE

EVision Energy Trading & Electrical Installations W.L.L is an electrical contractor in Doha for e-Mobility, busway systems and MEP works, approvals included.

Registered in 2025. Continues a team track record in Qatar since 2014.

Never OFF, Always ON

E-MOBILITY | BUSWAY SYSTEMS | ✚ MEP

12+	250+	7	3
YEARS OF TEAM EXPERIENCE	BUSWAY PROJECTS	DC STATIONS LIVE	APPROVAL AUTHORITIES

CREDENTIALS

- UPDA Grade-A engineers
- Kahramaa-approved engineers
- QCDD-certified engineers
- 24-hour busway emergency response

CR 231207 · Est. ID 17-3003-64

e-Mobility.
Supplied, installed, maintained.



7–22 kW
AC CHARGING

30–400 kW
DC FAST CHARGING

- **Supply** of premium charger brands, genuine and warrantied.
- **Installation and commissioning**, sized to the site.
- **Approvals** handled with Tarsheed, the Municipality and Kahramaa.
- **Maintenance** with preventive visits and same-day response.



Delivered by EVision: Ezdan Palace Hotel, 60 kW DC fast-charging canopy. Design, civil and MEP works, approvals and commissioning.

DC CHARGER STAGES IN QATAR

01	02	03	04	05
Tarsheed registration	Municipality permit	Kahramaa approval	Install & commission	Operate & maintain

Busway risers.

Any brand. 100–4000 A.



250+

Busway installation, maintenance and modification projects

SAME-DAY EMERGENCY WORKS


- Rectification of failed joints
- Tap-off modification and fabrication
- Busway installation, any brand
- Thermal scanning under load
- Condition reports with thermal images

How we work: thermal scan under load › isolate › rectify and re-torque joints › Megger test › re-energise and re-scan › certificate and photo record.

Viva Bahriya Tower 3, The Pearl · Qatari Diyar Building, Lusail · InterContinental Hotel · Al Fardan Building · Mall of Qatar · QNB Al-Mathaf Tower · Abdullah Abdulghani Commercial Tower · Tornado Tower · West View Residence (CBQ) · The Gate Mall · Doha Festival City Showroom · The Eighteen Tower · Ministry of Culture Tower · Al Shahd Tower

A selection, not a complete list

Any modification.
Any brand. 24h response.

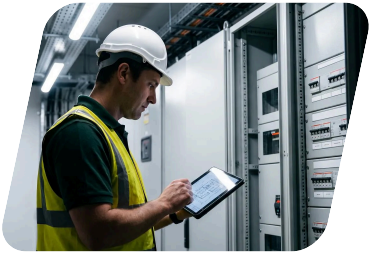

24h

Emergency response for busway systems of any brand

ANY BRAND · ANY HOUR

- Tap-off box additions and relocation
- Joint pack replacement and re-torque
- Riser extension and re-routing
- Fire-barrier and IP restoration

How an emergency call runs: engineer dispatched › isolate and make safe › locate the fault under thermal scan › rectify › Megger test › re-energise and re-scan › report and certificate.

Hot joints | Tripping risers | Burnt tap-off boxes | Water ingress | Insulation failure | Load increase | Section replacement | Busway extension | Tap-off relocation | Earth continuity | Fire-stop repair | Shutdown planning

Every manufacturer, every rating 100–4000 A

Charging at home. Villas and compounds.

AC wallboxes for villas, apartments and compounds. We check the load, run a dedicated protected circuit, and hand the charger over ready to use.



200+ HOME CHARGERS INSTALLED ACROSS DOHA

UDC APPROVALS HANDLED

The Pearl-Qatar • Gewan Island

Living on The Pearl or Gewan? We install to **United Development Company** building standards and handle the UDC approvals for you.

- VILLAS & HOMES
- COMPOUNDS
- WORKPLACES & CAR PARKS
- PREMIUM BRANDS, AC 7–22 KW

Let’s switch
your project on.

Tell us the site and what you need. An engineer replies with the next step, normally within one business day.

SAVE OUR CONTACT

+974 3398 8942
CALL OR WHATSAPP

info@evision-energy.com
QUOTATIONS AND ENQUIRIES

www.evision-energy.com
BROCHURE, PROJECTS AND BRANDS

Salwa Road, St. 340, Bldg 263
DOHA, QATAR

EVision Energy Trading & Electrical Installations W.L.L

إيفيجن إنيرجي للتجاره والتركيبات الكهربائيه

CR 231207 · Est. ID 17-3003-64